



**POWERLINE PRODUCT & SPECIFICATION CATALOG**

## Table Of Contents

### PREMIUM POWERLINE

Grandeur Classic .....	1
Grandeur Sprint V/H .....	2
Performer HP .....	3
Performer SUV .....	4

### VALUE POWERLINE

Steelrider RBL .....	5
Steelrider WSW .....	6
Stealth SUV .....	7

### TEMPRA PASSENGER

Esquire A/S .....	8
-------------------	---

### RADIAL LIGHT TRUCK

Performer A/T .....	9
Performer RV .....	10
Stealth AP .....	10

### TEMPRA LIGHT TRUCK

Trailcutter Radial HLT .....	11
Trailboss Rib .....	11
Trailcutter Radial R/T .....	12
Trailcutter Radial M/T .....	13

### TEMPRA WINTER

Winter Quest Pass .....	14
Winter Quest SUV .....	15
Trailcutter M&S .....	15

Tempra Tread Designs .....	16
Warranty .....	17

## Laramie Limited Warranty \*

All **LARAMIE** Tires are warranted to be free from defects in workmanship and material for the life of the original tread.

A **LARAMIE** passenger or light truck tire will be replaced free of charge if found defective within the first 1/32nd of treadwear. Thereafter a prorated adjustment on usable tread will be made down to 2/32nd. A tire is completely worn at 2/32nd (indicated by treadwear band). All defective **LARAMIE** tires must be replaced with a comparable **LARAMIE** product.

*\*The Limited Warranty is only offered to customers in the Continental United States.*

## Speed Ratings

The Rubber Manufacturers Association and the Tire and Rim Association list the following speed rating designations:

- N Up to 87 MPH (140 KMH)
- P Up to 93 MPH (150 KMH)
- Q Up to 100 MPH (160 KMH)
- S Up to 112 MPH (180 KMH)
- T Up to 118 MPH (190 KMH)
- H Up to 130 MPH (210 KMH)
- V Up to 149 MPH (240 KMH)
- Z Over 149 MPH (240+ KMH)

*\*Laramie's speed rated tires are designed for use at the maximum speeds listed above, however we recommend that motorists exercise caution while driving and always observe legal speed limits.*

## Department of Transportation Quality Grades

### TREADWEAR

The treadwear grade is a comparative rating based on the wear rate of the tire when tested under controlled conditions on a specified government test course. For example, a tire graded 400 would wear twice as well on the government course as a tire graded 200. However, the relative performance of tires depends upon the actual conditions of their use, and may depart significantly from the norm due to variations in driving habits, service practices and differences in road characteristics and climate.

### TRACTION

The traction grades, from highest to lowest are AA, A, B, and C. These grades represent the tire's ability to stop on wet pavement as measured under controlled conditions on specified government test surfaces of asphalt and concrete.

**IMPORTANT NOTE:** The traction grade assigned is based on braking traction and does not include cornering traction.

### TEMPERATURE

The temperature grades, from highest to lowest are A, B, and C. These grades represent the tire's resistance to the generation of heat and its ability to dissipate heat when tested under controlled conditions on a specified indoor laboratory test wheel. Sustained high temperature can cause the material of the tire to degenerate and reduce tire life, and excessive temperature can lead to sudden tire failure.

**IMPORTANT NOTE:** Excessive speed, under-inflation, or excessive loading, either separately or in combination, can cause heat build up and possible tire failure.

*Other factors that affect tire performance from one vehicle to another would be automatic vs. manual transmission, horsepower, gear ratios, etc.*

# Grandeur Classic

55/60/65/70 SERIES

UTQG RATING		
TREADWEAR	TRACTION	TEMP
620	A	B

80,000 MILE LIMITED TREADWEAR WARRANTY

50% FREE REPLACEMENT FOR DEFECTS  
IN WORKMANSHIP AND MATERIALS



## Ultra Premium Touring T-Speed Rated Tire

A top of the line tire to better match today's luxury vehicles and handle like a performance tire.

## Flow-Through Tread Design

State-of-the-art all weather tread with specially designed center rib for increased stability.

## Long-Wearing Deep Tread

Durable polyester cord body affords a quiet, smooth luxury ride.

## Stylized Sidewalls

Great looks with white stripe that reverses to raised black-on-black lettering. Attractively serrated blackwall sizes available for luxury imports and domestic performance sedans.

ITEM NUMBER	TIRE SIZE	SERVICE DESCRIPTION	MEASURING RIM WIDTH	APPROVED RIM WIDTH	MAXIMUM LOAD @44 PSI	OVERALL DIAMETER	SECTION WIDTH	TREAD WIDTH	REVOLUTIONS PER MILE	TREAD DEPTH IN 32nds	WEIGHT	PRICE
<b>RBL</b>												
1130540	P185/65R14	85 T	5.5	5.0 - 6.5	1124	23.46	7.44	5.80	888	11.0	18	
1130541	P185/65R15	86 T	5.5	5.0 - 6.0	1168	24.45	7.44	5.86	853	11.0	19	
1130542	P195/65R15	89 T	6.0	5.5 - 7.0	1279	25.00	7.91	6.17	834	11.0	20	
1130543	P205/65R15	92 T	6.0	5.5 - 7.5	1400	25.47	8.23	6.42	819	11.0	20	
1130544	P215/65R15	95 T	6.5	6.0 - 7.5	1510	26.02	8.70	6.79	801	11.0	23	
1130545	P215/65R16	96 T	6.5	6.0 - 7.5	1565	27.01	8.70	6.79	772	11.0	25	
1130520	P185/60R14 *	82 T	5.5	5.0 - 6.5	1047	22.80	7.15	6.00	912	10.5	17	
1130521	P195/60R14 *	85 T	6.0	5.5 - 7.0	1135	23.28	7.62	6.40	893	10.5	18	
1130522	P185/60R15	84 T	5.5	5.0 - 6.5	1102	23.76	7.44	5.86	876	11.0	18	
1130523	P195/60R15	87 T	6.0	5.5 - 7.0	1190	24.21	7.91	6.25	860	11.0	19	
1130524	P205/60R15	90 T	6.0	5.5 - 7.5	1301	24.69	8.23	6.50	844	11.0	20	
1130525	P215/60R15	93 T	6.5	6.0 - 7.5	1411	25.16	8.70	6.87	829	11.0	22	
1130526	P215/60R16	94 T	6.5	6.0 - 7.5	1477	26.14	8.70	6.87	797	11.0	24	
1130527	P225/60R16	97 T	6.5	6.0 - 8.0	1609	26.61	8.98	7.09	783	11.0	25	
1230528 ^	P235/60R16	99 T	7.0	6.5 - 8.0	1709	27.09	9.45	7.46	769	11.0	26	
1130510	P205/55R16	89 T	6.5	5.5 - 7.5	1279	24.88	8.43	6.99	837	11.0	22	
1230511 ^	P225/55R17	95 T	7.0	6.0 - 8.0	1521	26.76	9.20	7.40	776	11.0	27	
<b>WSW</b>												
1130570	P185/70R14	87 T	5.5	4.5 - 6.0	1201	24.25	7.44	5.51	859	11.0	18	
1130571	P195/70R14	90 T	6.0	5.0 - 6.5	1312	24.80	8.05	5.86	840	11.0	20	
1130572	P205/70R15	95 T	6.0	5.0 - 7.0	1499	26.34	8.23	6.10	791	11.0	22	
1130573	P215/70R15	97 T	6.5	5.5 - 7.0	1620	26.89	8.70	6.45	775	11.0	23	
1130530	P225/60R16	97 T	6.5	6.0 - 8.0	1609	26.61	8.98	7.09	783	11.0	26	

\* UTQG 440 AB

^ Tempra Touring tr (see page 14 for tread design)



# Grandeur Sprint V/H



UTOG RATING			
SPEED RATING	TREADWEAR	TRACTION	TEMP
V	360	A	A
H	420	A	A

55/60/65 SERIES

50,000 MILE LIMITED TREADWEAR WARRANTY

## Touring Combined with Performance

New touring tread design allows for excellent dry handling, and wet grip for all season reliability and performance.

## Special Nylon Overlap

New construction enhances stability and steering response.

## Stylized Sidewalls

Raised lettering on a serrated background presents an exciting, eye-catching appearance.

## Tread Performance

Special high performance compound provides maximum grip, while delivering outstanding treadwear.

ITEM NUMBER	TIRE SIZE	SERVICE DESCRIPTION	MEASURING RIM WIDTH	APPROVED RIM WIDTH	MAXIMUM LOAD @44 PSI	OVERALL DIAMETER	SECTION WIDTH	TREAD WIDTH	REVOLUTIONS PER MILE	TREAD DEPTH IN 32nds	WEIGHT	PRICE
<b>RBL</b>												
1232510 *	215/50R17	91 V	7.0	6.0 - 7.5	1356	25.46	9.34	7.37	817	11.0	24	
1232511 *	225/50R17	94 V	7.0	6.0 - 8.0	1477	25.89	9.66	7.69	802	11.0	26	
1231521 ^	P185/60R14	82 H	5.5	5.0 - 6.0	1047	22.73	7.56	6.10	914	11.0	18	
1231522 ^	P195/60R14	85 H	6.0	5.5 - 6.5	1135	23.20	7.92	6.48	894	11.0	19	
1131520	P195/60R15	87 H	6.0	5.5 - 6.5	1190	24.20	7.92	6.48	894	11.0	20	
1131521	P205/60R15	90 H	6.0	5.5 - 7.0	1301	24.65	8.33	6.76	841	11.0	22	
1231523 ^	P215/60R15	93 H	6.5	6.0 - 7.0	1411	25.10	8.95	7.13	828	11.0	24	
1231524 ^	P205/60R16	91 H	6.0	5.5 - 7.5	1356	25.65	8.33	6.74	809	11.0	23	
1131522	P225/60R16	97 H	6.5	6.0 - 7.5	1609	26.56	9.07	7.36	782	11.0	25	
1231542 ^	P185/65R15	86 H	5.5	5.0 - 6.5	1168	24.95	7.60	5.95	832	11.0	20	
1131540	P195/65R15	89 H	6.0	5.5 - 6.5	1279	24.97	8.10	6.32	831	11.0	21	
1131541	P205/65R15	92 H	6.0	5.5 - 7.0	1400	25.41	8.22	6.66	817	11.0	22	
1131510	P205/55R16	89 H	6.5	5.5 - 7.5	1279	24.86	8.95	7.17	836	11.0	23	
1231511 ^	P215/55R16	91 H	7.0	6.0 - 7.5	1356	25.27	8.90	7.57	822	11.0	23	
1231512 ^	225/55R16	95 H	7.0	6.0 - 8.0	1521	25.77	9.29	7.59	806	11.0	25	

\* Tempra Touring vr (see page 14 for tread design)

^ Tempra Touring hr (see page 14 for tread design)

# Performer HP



UTQG RATING		
TREADWEAR	TRACTION	TEMP
440	A	B

50/60/65/70 SERIES

50,000 MILE LIMITED TREADWEAR WARRANTY

## New High Performance Look and Feel

Delivers superior handling and traction on wet or dry pavement while resisting hydroplaning. All-season M&S rated capabilities. **T-Speed** rated.

## Tread Performance

Wide footprint and bold tread elements combine to enhance overall performance.

## Sidewall Styling

Contemporary raised white letters with stylized black lettering on the reverse side.

ITEM NUMBER	TIRE SIZE	SERVICE DESCRIPTION	MEASURING RIM WIDTH	APPROVED RIM WIDTH	MAXIMUM LOAD @44 PSI	OVERALL DIAMETER	SECTION WIDTH	TREAD WIDTH	REVOLUTIONS PER MILE	TREAD DEPTH IN 32nds	WEIGHT	PRICE
<b>RBL</b>												
1231001 ^	P225/50R15	90 S	7.0	6.5 - 8.0	1301 +	23.90	8.94	7.45	870	10.5	22	
<b>RWL</b>												
1131070	P215/70R14	96 T	6.5	5.5 - 7.0	1554	25.76	8.66	7.00	807	10.5	22	
1131071	P225/70R14	98 T	6.5	6.0 - 7.5	1675	26.27	8.92	7.20	792	10.5	24	
1131073	P225/70R15	100 T	6.5	6.0 - 7.5	1753	27.37	8.71	7.20	760	10.5	25	
1131074	P235/70R15	102 T	7.0	6.0 - 8.0	1896	27.90	9.46	7.60	745	10.5	27	
1131075	P255/70R15	108 T	7.5	6.5 - 8.5	2183	28.95	10.40	8.20	718	10.5	30	
1131050	P215/65R15	95 T	6.5	6.0 - 7.5	1510	26.00	8.38	6.80	799	10.5	22	
1231036 ^	P205/60R13	86 T	6.0	5.5 - 7.0	1179	22.75	7.86	6.50	914	10.5	17	
1131030	P215/60R14	91 T	6.5	6.0 - 7.5	1345	24.16	8.42	7.00	861	10.5	21	
1231037 ^	P225/60R14	94 T	6.5	6.0 - 7.5	1455	24.57	8.70	7.20	846	10.5	22	
1231031 ^	P235/60R14	96 T	7.0	6.5 - 8.0	1565	25.06	9.11	7.60	830	10.5	24	
1231038 ^	P245/60R14	98 T	7.0	7.0 - 8.0	1675	25.50	9.41	8.00	815	10.5	25	
1131032	P235/60R15	98 T	7.0	6.5 - 8.5	1642	26.11	9.15	7.60	796	10.5	25	
1131033	P245/60R15	100 T	7.0	7.0 - 8.5	1753	26.55	9.47	8.00	783	10.5	26	
1131034	P255/60R15	102 T	7.5	7.0 - 9.0	1885	27.01	9.73	8.20	769	10.5	28	
1131035	P275/60R15	107 T	8.0	7.5 - 9.5	2149	28.06	10.70	8.90	741	10.5	31	
1231002 ^	P265/50R15 *	99 S	8.5	8.0 - 9.5	1720 +	25.63	10.51	8.80	811	10.5	27	
1131000	P295/50R15 *	105 S	9.5	8.0 - 10.0	2061 +	26.80	11.77	10.10	775	10.5	32	
1231007 ^	P295/50R16	107 S	9.5	8.0 - 10.0	2149	27.69	11.93	10.05	752	10.5	35	

\* UTQG 440 AC + @ 35 PSI

^ Tempra GT Radial (see page 14 for tread design)

# Performer SUV

65/70/75 SERIES

UTOG RATING		
TREADWEAR	TRACTION	TEMP
520	A	B

60,000 MILE LIMITED TREADWEAR WARRANTY

25% FREE REPLACEMENT FOR DEFECTS  
IN WORKMANSHIP AND MATERIALS

## Premium SUV Performance

A new superior level of control and comfort is achieved for the latest generation of luxury and performance sport utility and light truck vehicles.

## Ride Control

Solid shoulder ribs provide precise handling, quiet ride and excellent mileage.

## Tread Design

All-weather M&S design for exceptional control on wet and dry pavement.

ITEM NUMBER	TIRE SIZE	SERVICE DESCRIPTION	MEASURING RIM WIDTH	APPROVED RIM WIDTH	PASS MAX LOAD @44 PSI	LT MAX LOAD @44 PSI <sup>1</sup>	OVERALL DIAMETER	SECTION WIDTH	TREAD WIDTH	REVOLUTIONS PER MILE	TREAD DEPTH IN 32nds	WEIGHT	PRICE
<b>BLK</b>													
1241219 ^	215/70R16	100 S	6.5	5.5 - 7.0	1764		27.75	8.8	7.20	753	13.0	29	
<b>OWL</b>													
1141230	P215/75R15	100 S	6.0	5.5 - 7.0	1742	1584	27.60	8.60	5.95	750	13.0	25	
1141231	P225/75R15	102 S	6.0	6.0 - 7.0	1874	1704	28.20	8.95	6.20	735	13.0	27	
1141232	P235/75R15	105 S	6.5	6.0 - 7.5	2028	1844	28.85	9.30	6.45	719	13.5	29	
1141233	P265/75R15	112 S	7.5	7.0 - 8.5	2469	2245	30.50	10.65	7.60	680	14.0	38	
1241237 ^	P225/75R16	104 S	6.0	6.0 - 8.0	1984	1804	29.15	8.65	6.40	711	13.0	30	
1141234	P235/75R16	106 S	6.5	6.0 - 8.0	2094	1904	29.70	9.30	6.90	700	13.5	33	
1141235	P245/75R16	109 S	7.0	6.5 - 7.5	2271	2065	30.35	9.60	7.00	683	13.5	34	
1141236	P265/75R16	114 S	7.5	7.0 - 8.5	2601	2365	31.50	10.60	7.60	658	14.0	40	
1141220	P235/70R15	102 S	7.0	6.0 - 7.5	1896	1724	27.80	9.65	7.40	746	12.0	29	
1141221	P235/70R16	104 S	7.0	6.0 - 7.5	1984	1804	28.85	9.40	7.40	719	13.0	33	
1141222	P245/70R16	106 S	7.0	6.5 - 8.0	2094	1904	29.40	9.90	7.70	705	13.0	33	
1141223	P255/70R16	109 S	7.5	6.5 - 8.0	2271	2065	29.95	10.30	8.00	692	13.5	36	
1141224	P265/70R16	111 S	8.0	7.0 - 9.0	2403	2185	30.40	10.80	8.00	682	13.5	37	
1141225	P265/70R17	113 S	8.0	7.0 - 8.5	2535	2305	31.40	10.65	8.30	660	13.5	40	
1241210 ^	P235/65R17	103 S	7.0	6.5 - 8.5	1929	1754	29.06	9.45	7.65	715	12.0	31	
1141211	P245/65R17	105 S	7.0	7.0 - 8.5	2039	1854	29.45	9.82	9.27	685	12.0	33	

^ Tempra Tour SUV (see page 14 for tread design)

<sup>1</sup> When passenger tires are used in light truck service, Industry Tire and Rim Standards apply a 10% reduction in maximum rated load.



UTQG RATING		
TREADWEAR	TRACTION	TEMP
440	A	B

55/60/65/70/75 SERIES

50,000 MILE LIMITED TREADWEAR WARRANTY

### All-Weather Tread Design

Precision designed tread pattern delivers excellent traction for stopping and starting in all driving conditions.

### Mileage and Performance

Advanced tread compound gives extended mileage and premium performance.

### Sidewall Treatment

High definition raised black lettering combined with innovative serration patterns add to the uniqueness and further enhance the appearance of this extensive product line.

ITEM NUMBER	TIRE SIZE	SERVICE DESCRIPTION	MEASURING RIM WIDTH	APPROVED RIM WIDTH	MAXIMUM LOAD @44 PSI	OVERALL DIAMETER	SECTION WIDTH	TREAD WIDTH	REVOLUTIONS PER MILE	TREAD DEPTH IN 32nds	WEIGHT	PRICE
<b>BLK</b>												
1230086 ^	165R15 *	86 T	4.5	4.0 - 5.5	1168	25.33	6.45	4.70	819	10.0	17	
1130001	P175/70R13	82 S	5.0	4.5 - 6.0	1036	22.68	6.89	4.90	914	10.0	14	
1130003	P185/70R13	85 S	5.5	4.5 - 6.0	1135	23.23	7.40	5.10	893	10.0	15	
1230067 ^	P175/70R14	84 S	5.0	4.5 - 5.5	1102	23.18	6.89	4.90	896	10.0	15	
1130009	P185/70R14	87 S	5.5	4.5 - 6.0	1201	24.23	7.40	5.10	856	10.0	17	
1130013	P195/70R14	90 S	6.0	5.0 - 6.5	1312	24.78	7.80	5.40	837	10.0	17	
1130017	P205/70R14	93 S	6.0	5.0 - 7.0	1433	25.28	8.11	5.60	822	10.0	187	
1130035	P205/70R15	95 S	6.0	5.0 - 7.0	1499	26.28	8.11	5.60	790	10.0	19	
1130039	P215/70R15	97 S	6.5	5.5 - 7.0	1620	26.78	8.58	5.90	774	10.0	21	
1130005	P175/65R14	81 S	5.0	5.0 - 6.0	1019	22.90	6.85	5.00	907	10.0	15	
1130007	P185/65R14	85 S	5.5	5.0 - 6.5	1124	23.35	7.35	5.35	889	10.0	17	
1230046 ^	P195/65R14 +	88 S	6.0	5.5 - 6.5	1235	23.95	7.80	5.85	865	10.5	18	
1130029	P195/65R15	89 S	6.0	5.5 - 7.0	1279	24.90	7.80	5.70	839	10.0	18	
1130031	P205/65R15	92 S	6.0	5.5 - 7.5	1400	25.25	8.16	5.85	823	10.0	20	
1130033	P215/65R15	95 S	6.5	6.0 - 7.5	1510	25.88	8.65	6.38	807	10.0	22	
1130059	P215/65R16	96 S	6.5	6.0 - 7.5	1565	26.95	8.65	6.50	767	11.0	24	
1130055	P215/60R16	94 S	6.5	6.0 - 7.5	1477	26.10	8.55	6.40	801	10.0	23	
1130057	P225/60R16	97 S	6.5	6.0 - 8.0	1609	26.52	8.80	6.60	788	10.0	24	
1230010 ^	P205/55R15 +	87 S	6.5	6.0 - 7.5	1201	23.80	8.30	7.00	870	10.5	21	
1130053	P205/55R16	89 S	6.5	5.5 - 7.5	1279	24.75	8.30	7.10	844	10.0	22	
1130049	P235/75R15	XL	6.5	6.0 - 8.0	2183	28.65	9.10	6.30	724	11.0	28	

^ Tempra Duration (see page 14 for tread design)

\* UTQG 360 AB, + UTQG 520 AB



UTQG RATING		
TREADWEAR	TRACTION	TEMP
440	A	B

60/65/70/75/80 SERIES

50,000 MILE LIMITED TREADWEAR WARRANTY

### All-Weather Tread Design

Precision designed tread pattern delivers excellent traction for stopping and starting in all driving conditions.

### Sidewall Treatment

O.E. white sidewall with an attractive serrated styling on reverse side.

### Mileage and Performance

Advanced tread compound gives extended mileage and premium performance.

ITEM NUMBER	TIRE SIZE	SERVICE DESCRIPTION	MEASURING RIM WIDTH	APPROVED RIM WIDTH	MAXIMUM LOAD @44 PSI	OVERALL DIAMETER	SECTION WIDTH	TREAD WIDTH	REVOLUTIONS PER MILE	TREAD DEPTH IN 32nds	WEIGHT	PRICE
<b>WSW</b>												
1230081 ^	P155/80R13		4.5	4.0 - 5.0	959	22.75	6.10	3.90	911	9.5	12	
1230082 ^	P165/80R13		4.5	4.0 - 5.0	1069	23.30	6.45	4.10	890	10.0	13	
1230083 ^	P175/80R13		5.0	4.5 - 5.5	1179	24.00	6.85	4.40	864	10.0	14	
1230084 ^	P185/80R13		5.0	4.5 - 6.0	1301	24.50	7.20	4.60	846	10.0	15	
1230097 ^	P175/75R14		5.0	4.5 - 5.5	1168	24.20	6.85	4.40	857	10.0	15	
1130023	P185/75R14		5.0	4.5 - 6.0	1290 +	24.80	7.20	4.60	836	10.0	17	
1130025	P195/75R14		5.5	5.0 - 6.5	1400 +	25.40	7.60	4.90	816	10.0	18	
1130027	P205/75R14		5.5	5.0 - 7.0	1532 +	25.95	7.95	5.10	799	10.5	19	
1230098 ^	P215/75R14		6.0	5.5 - 7.0	1664	26.55	8.40	5.40	781	10.5	20	
1230099 ^	P225/75R14		6.0	6.0 - 7.0	1797	27.05	8.70	5.60	766	11.0	22	
1130043	P205/75R15		5.5	5.0 - 7.0	1598 +	26.95	7.95	5.10	769	10.5	20	
1130045	P215/75R15		6.0	5.5 - 7.0	1742 +	27.55	8.40	5.40	753	10.5	22	
1130047	P225/75R15		6.0	6.0 - 7.5	1874 +	28.05	8.70	5.60	739	10.5	24	
1130051	P235/75R15		6.5	6.0 - 8.0	2028 +	28.65	9.10	5.90	724	11.0	26	
1130011	P185/70R14	87 S	5.5	4.5 - 6.0	1201	24.23	7.40	5.10	856	10.0	17	
1130015	P195/70R14	90 S	6.0	5.0 - 6.5	1312	24.78	7.80	5.40	837	10.0	18	
1130019	P205/70R14	93 S	6.0	5.0 - 7.0	1433	25.28	8.11	5.60	822	10.0	19	
1130021	P215/70R14	96 S	6.5	5.5 - 7.0	1554	25.78	8.58	5.90	804	10.0	21	
1130037	P205/70R15	95 S	6.0	5.0 - 7.0	1499	26.28	8.11	5.60	790	10.0	20	
1130041	P215/70R15	97 S	6.5	5.5 - 7.0	1620	26.78	8.58	5.90	774	10.0	22	

^ *Tempra Duration* (see page 14 for tread design)

+ Max load @35 PSI

# Stealth SUV



UTQG RATING		
TREADWEAR	TRACTION	TEMP
400	A	B

70/75 SERIES

40,000 MILE LIMITED TREADWEAR WARRANTY

## New Generation Tread Design

Modern rib all-season design with distinctive siping and circumferential grooves, provide superior performance under any conditions.

## Stylized Sidewall

Raised outline white lettering reverses to decorative black sidewall to satisfy any consumer preference.

## Wide Application

Broad range of sizes for many of today's popular SUVs and light trucks.

ITEM NUMBER	TIRE SIZE	SERVICE DESCRIPTION	MEASURING RIM WIDTH	APPROVED RIM WIDTH	PASS MAX LOAD @35 PSI	LT MAX LOAD @35 PSI <sup>1</sup>	OVERALL DIAMETER	SECTION WIDTH	TREAD WIDTH	REVOLUTIONS PER MILE	TREAD DEPTH IN 32nds	WEIGHT	PRICE
<b>OWL</b>													
1240037 ^	P205/75R15	97 S	5.5	5.0 - 7.0	1598 -	1453 -	26.93	8.10	5.70	772	11.0	23	
1140030	P215/75R15	100 S	6.0	5.5 - 7.0	1742	1584	27.48	8.60	6.00	757	11.0	24	
1140031	P225/75R15	102 S	6.0	6.0 - 7.5	1874	1704	28.08	8.95	6.20	740	11.0	26	
1140032	P235/75R15	105 S	6.5	6.0 - 8.0	2039	1854	28.70	9.30	6.50	724	11.0	28	
1140033	P235/75R15 *	108 S	6.5	6.0 - 8.0	2183 +	1985 +	28.88	9.32	6.90	721	11.0	31	
1140034	P265/75R15	112 S	7.5	7.0 - 8.5	2469	2245	30.40	10.65	7.60	680	11.0	36	
1140035	P245/75R16	109 S	7.0	6.5 - 8.0	2271	2065	30.20	9.75	7.10	688	11.0	33	
1140036	P265/75R16	114 S	7.5	7.0 - 8.5	2601	2365	31.32	10.60	7.80	664	11.0	37	
1240017 ^	235/70R15	103 S	7.0	6.0 - 7.5	1929	1754	27.70	9.65	7.30	750	11.0	28	
1140020	P235/70R16	104 S	7.0	6.0 - 7.5	1984	1804	28.73	9.40	7.40	724	11.0	31	
1140021	P245/70R16	106 S	7.0	6.5 - 8.0	2094	1904	29.38	9.85	7.70	708	11.0	32	
1140022	P255/70R16	109 S	7.5	6.5 - 8.5	2271	2065	29.80	10.30	8.00	698	11.0	34	
1140023	265/70R16	112 S	8.0	7.0 - 9.0	2469	2245	30.20	10.80	7.84	687	11.0	35	

\* Reinforced, + @41 PSI - @44 PSI

^ Tempra Radial SUV (see page 14 for tread design)

<sup>1</sup> When passenger tires are used in light truck service, Industry Tire and Rim Standards apply a 10% reduction in maximum rated load.

# Esquire A/S



UTQG RATING		
TREADWEAR	TRACTION	TEMP
340	B	B

75/80 SERIES

### Competitively Priced

Economy all-season with solid center rib for stability and even wear.

### M&S Rated

Optimized tread compound for excellent traction in all conditions.

### Tough Steel-Belted Construction

Polyester cord body for a comfortable ride with steel belts for protection and durability.

ITEM NUMBER	TIRE SIZE	MEASURING RIM WIDTH	APPROVED RIM WIDTH	MAX LOAD @35 PSI	OVERALL DIAMETER	SECTION WIDTH	TREAD WIDTH	REVOLUTIONS PER MILE	TREAD DEPTH IN 32nds	WEIGHT	PRICE
<b>WSW</b>											
1230181	P155/80R13	4.5	4.0 - 5.0	959	22.75	6.10	3.90	911	9.5	12.0	
1230182	P165/80R13	4.5	4.0 - 5.5	1069	23.30	6.45	4.10	890	10.0	13.0	
1230183	P175/80R13	5.0	4.5 - 5.5	1179	24.00	6.85	4.40	864	10.0	14.0	
1230184	P185/80R13	5.0	4.5 - 6.0	1301	24.50	7.20	4.60	846	10.0	15.0	
1230190	P185/75R14	5.0	4.5 - 6.0	1290	24.80	7.20	4.60	836	10.0	17.0	
1230191	P195/75R14	5.5	5.0 - 6.5	1400	25.40	7.60	4.90	816	10.0	18.0	
1230192	P205/75R14	5.5	5.0 - 7.0	1532	25.95	7.95	5.10	799	10.5	19.0	
1230198	P215/75R14	6.0	5.5 - 7.0	1664	26.55	8.40	5.40	781	10.5	20.0	
1230193	P205/75R15	5.5	5.0 - 7.0	1598	26.95	7.95	5.10	769	10.5	20.0	
1230194	P215/75R15	6.0	5.5 - 7.0	1742	27.55	8.40	5.40	753	10.5	22.0	
1230195	P225/75R15	6.0	6.0 - 7.5	1874	28.05	8.70	5.60	739	10.5	23.0	
1230196	P235/75R15	6.5	6.0 - 8.0	2028	28.65	9.10	5.90	724	11.0	24.0	

# Performer A/T



50,000 MILE LIMITED TREADWEAR WARRANTY

## All Terrain Tread

Deep, aggressive tread design delivers exceptional traction and roadability. Extensive, full depth siping and wide grooves provide superior water dispersion.

## On/Off Road Performance

Premium light truck construction allows for extended mileage even under harsh conditions. Excellent performance in commercial applications.

## Appearance

Outline white/raised black lettering combined with unique serrated background present an attractive, premium appearance.

ITEM NUMBER	TIRE SIZE	SERVICE DESCRIPTION	MEASURING RIM WIDTH	APPROVED RIM WIDTH	PASS MAX LOAD @44 PSI	LT MAX LOAD @44 PSI <sup>1</sup>	OVERALL DIAMETER	SECTION WIDTH	TREAD WIDTH	REVOLUTIONS PER MILE	TREAD DEPTH IN 32nds	WEIGHT	PRICE
<b>OWL</b>													
1142530*	235/75R15	105 S	6.5	6.0 - 7.5	2039	1854	28.90	9.23	7.0	723	14.0	30	
1142534*	245/75R16	111 S	7.0	6.5 - 7.5	2403	2185	30.52	9.65	7.4	685	14.0	34	
1142536*	265/75R16	116 S	7.5	7.0 - 8.5	2756	2505	31.65	10.51	8.0	660	14.5	38	
1142521*	235/70R16	106 S	7.0	6.0 - 8.0	2094	1904	28.99	9.46	7.4	720	13.5	33	

\* UTQG 500AB

<sup>1</sup> When passenger tires are used in light truck service, Industry Tire and Rim Standards apply a 10% reduction in maximum rated load.

ITEM NUMBER	TIRE SIZE	LOAD RANGE	LOAD INDEX	MEAS. RIM WIDTH	APPROVED RIM WIDTH	MAXIMUM LOAD				OVERALL DIAM.	SEC. WIDTH	LOADED WIDTH	LOADED RADIUS	REV PER MILE	TREAD DEPTH IN 32nds	WEIGHT	PRICE
						SINGLE PSI	LBS.	DUAL PSI	LBS.								
<b>RBL</b>																	
1152550	LT215/85R16	E	115/112 Q	6.0	5.5 - 7.0	80	2680	80	2470	30.30	9.10	10.0	14.1	686	16.5	38	
1152551	LT235/85R16	E	120/116 Q	6.5	6.0 - 7.0	80	3042	80	2778	31.78	9.36	10.6	14.8	661	16.5	43	
1152532	LT225/75R16	D	110/107 Q	6.0	6.0 - 7.0	65	2335	65	2150	29.44	8.82	9.4	13.6	712	16.5	37	
1152531	LT225/75R16	E	115/112 Q	6.0	6.0 - 7.0	80	2680	80	2470	29.48	8.82	9.7	13.6	712	16.5	39	
1152533	LT245/75R16	E	120/116 Q	7.0	6.5 - 7.5	80	3042	80	2778	30.52	9.62	10.4	14.2	688	16.5	43	
<b>OWL</b>																	
1252552 ^	LT255/85R16	D	119/116 N	7.0	6.5 - 8.0	65	3000	65	2755	33.02	9.87	10.7	15.2	628	16.5	43	
1152530	LT235/75R15	C	104/101 Q	6.5	6.0 - 7.0	50	1985	50	1820	28.95	9.00	9.7	13.5	723	16.0	34	
1152534	LT245/75R16	C	108/104 Q	7.0	6.5 - 7.5	50	2205	50	2006	30.52	9.62	10.4	14.2	688	16.5	42	
1152536	LT265/75R16	C	112/109 Q	7.5	7.0 - 8.0	50	2470	50	2270	31.78	10.40	11.4	14.8	660	16.5	45	
1152535	LT265/75R16	E	123/120 Q	7.5	7.0 - 8.0	80	3415	80	3085	31.81	10.57	11.4	14.8	660	16.5	49	
1152538	LT285/75R16	D	122/119 Q	8.0	7.5 - 9.0	65	3305	65	3000	32.93	11.47	12.7	15.1	640	17.0	54	
1252525 ^	LT255/70R16	C	108/104 Q	7.5	6.5 - 8.0	50	2205	50	1985	30.00	10.36	11.3	13.7	695	16.5	41	
1252530 ^	LT265/70R17	C	112/109 Q	7.0	7.0 - 8.5	50	2470	50	2270	31.60	10.85	12.0	14.5	659	16.5	46	
1252532 ^	LT285/70R17	D	121/118 R	8.8	7.5 - 9.0	65	3196	65	2910	32.76	11.50			636	17.0	52	
1152500	30X9.50R15LT	C	104 Q	7.5	6.5 - 8.5	50	1985			29.30	9.30	10.1	13.6	711	16.5	36	
1152501	31X10.50R15LT	C	109 Q	8.5	7.0 - 9.0	50	2270			30.30	10.54	11.4	14.0	688	16.5	40	
1252502 ^	32X11.5R15LT	C	113 Q	9.0	8.0 - 10.0	50	2530			31.30	11.40	12.2	14.4	662	18.0	44	
1252503 ^	33X12.5R15LT	C	108 Q	10.0	8.5 - 11.0	35	2225			32.40	12.40	13.5	15.0	640	18.0	50	
1252507 ^	35X12.50R15LT	C	113 Q	10.0	8.5 - 11.0	35	2535			34.75	12.87	13.3	16.6	602	17.0	61	
1252505 ^	33X12.50R16.5LT	C	118 N	9.8	8.3 - 10.5	50	2910			32.30	12.70	13.8	15.0	642	18.0	55	

^ Tempra Trailcutter Radial A/T (see page 14 for tread design)



# Performer RV



ITEM NUMBER	TIRE SIZE	LOAD RANGE	LOAD INDEX	MEAS. RIM WIDTH	APPROVED RIM WIDTH	MAXIMUM LOAD				OVERALL DIAM.	SEC. WIDTH	LOADED WIDTH	LOADED RADIUS	REV PER MILE	TREAD DEPTH IN 32nds	WEIGHT	PRICE
						SINGLE		DUAL									
						PSI	LBS.	PSI	LBS.								
<b>OWL</b>																	
1153005	27x8.50R14LT	C	95 Q	7.0	6.0-7.5	50	1520			26.50	8.70	9.50	12.3	782	16.5	29.0	
1153001	31x10.50R15LT	C	109 Q	8.5	7.0-9.0	50	2270			30.20	10.50	11.40	14.0	687	16.5	40.0	

# Stealth AP



## Tread Design

Modern computer generated all-position tread design for long, even treadwear and a quiet ride. All-season rib design provides dependable traction and excellent handling.

## Sidewall Style

Classic outline white letters or serrated band with solid raised black letters, to meet all consumer tastes.

## Light Truck Sizes

Available in the most popular sizes and load ranges.

ITEM NUMBER	TIRE SIZE	LOAD RANGE	LOAD INDEX	MEAS. RIM WIDTH	APPROVED RIM WIDTH	MAXIMUM LOAD				OVERALL DIAM.	SEC. WIDTH	LOADED WIDTH	LOADED RADIUS	REV PER MILE	TREAD DEPTH IN 32nds	WEIGHT	PRICE
						SINGLE		DUAL									
						PSI	LBS.	PSI	LBS.								
<b>RBL</b>																	
1150050	LT215/85R16	D	110/107 N	6.0	5.5 - 7.0	65	2335	65	2150	30.20	8.40	9.7	14.1	687	14.0	34	
1150051	LT235/85R16	E	120/116 N	6.5	6.0 - 7.0	80	3042	80	2778	31.50	9.30	10.1	14.7	658	14.0	40	
1150031	LT225/75R16	D	110/107 N	6.0	6.0 - 7.0	65	2335	65	2150	29.10	8.70	9.5	13.6	713	14.0	34	
1150032	LT245/75R16	E	120/116 N	7.0	6.5 - 7.5	80	3042	80	2778	30.40	9.40	10.3	14.2	682	14.0	39	
1250003 ^	8.75R16.5LT	D	110/106 N	6.8	6.0 - 6.8	65	2350	65	2070	29.40	8.50	9.7	13.7	705	14.0	34	
1250004 ^	9.50R16.5LT	D	116/112 N	6.8	6.8 - 8.3	65	2780	65	2445	30.30	9.20	10.4	14.2	684	14.0	37	
<b>OWL</b>																	
1150030	LT235/75R15	C	104/101 Q	6.5	6.0 - 7.0	50	1985	50	1820	28.70	8.90	9.7	13.2	722	14.0	31	
1150033	LT265/75R16	C	112/109 N	7.5	7.0 - 8.0	50	2470	50	2270	31.63	10.38	11.3	14.7	654	14.0	42	
1150000	30X9.50R15LT	C	104 Q	7.5	6.5 - 8.5	50	1985			29.10	9.30	10.1	13.4	713	14.0	33	
1150001	31X10.50R15LT	C	109 Q	8.5	7.0 - 9.0	50	2270			30.00	10.50	11.4	13.8	691	14.0	37	

^ Tempra Radial AP (see page 14 for tread design)



# Trailcutter Radial HLT

## Tread Design

Deep five rib design delivers excellent wet or dry traction, handling and stability in highway service.

## Durability

Superior durability in commercial and other heavy duty use.

## Treadwear

Optimum tread distribution provides exceptionally long, even-wearing tread life.

ITEM NUMBER	TIRE SIZE	LOAD RANGE	LOAD INDEX	MEAS. RIM WIDTH	APPROVED RIM WIDTH	MAXIMUM LOAD				OVERALL DIAM.	SEC. WIDTH	LOADED WIDTH	LOADED RADIUS	REV PER MILE	TREAD DEPTH IN 32nds	WEIGHT	PRICE
						SINGLE		DUAL									
						PSI	LBS.	PSI	LBS.								
<b>RBL</b>																	
1250550	LT215/85R16	D	110/107 N	6.0	5.5 - 7.0	65	2335	65	2150	30.26	8.21	9.7	14.1	683	14.0	37	
1250552	LT215/85R16	E	115/112 Q	6.0	5.5 - 7.0	80	2680	80	2470	30.26	8.21	9.7	14.1	683	14.0	38	
1250551	LT235/85R16	E	120/116 N	6.5	6.0 - 7.0	80	3042	80	2778	31.70	9.21	10.1	14.7	656	14.0	43	
1250531	LT225/75R16	E	115/112 N	6.0	6.0 - 7.0	80	2680	80	2470	29.18	8.60	9.5	13.6	711	14.0	38	
1250532	LT245/75R16	E	120/116 N	7.0	6.5 - 7.0	80	3042	80	2778	30.46	9.35	10.3	14.2	680	14.0	42	
<b>OWL</b>																	
1250530	LT235/75R15	C	104/101 Q	6.5	6.0 - 7.0	50	1985	50	1820	28.80	9.05	9.6	13.4	722	14.0	33	

Note- Not M&S rated.



# Trailboss Rib

ITEM NUMBER	TIRE SIZE	LOAD RANGE	LOAD INDEX	MEAS. RIM WIDTH	APPROVED RIM WIDTH	MAXIMUM LOAD				OVERALL DIAM.	SEC. WIDTH	LOADED WIDTH	LOADED RADIUS	REV PER MILE	TREAD DEPTH IN 32nds	WEIGHT	PRICE
						SINGLE		DUAL									
						PSI	LBS.	PSI	LBS.								
<b>RBL</b>																	
1520230	8R19.5	F	124/122	6.0	5.25- 6.75	110	3525	110	3415	34.00	8.00	8.9	15.6	662	14.0	49	

Note- Not M&S rated.

# Trailcutter R/T



## Tread Design

Deep, aggressive lug design for excellent traction in both recreational and commercial applications.

## Performance

Designed for all-position usage on SUVs, pick-ups and 4x4s. Pinned for studs for greater mud and snow traction.

## Size Coverage

Extensive size line-up to address broad light truck market demands.

ITEM NUMBER	TIRE SIZE	SERVICE DESCRIPTION	MEASURING RIM WIDTH	APPROVED RIM WIDTH	PASS MAX LOAD @35 PSI	LT MAX LOAD @35 PSI <sup>1</sup>	OVERALL DIAMETER	SECTION WIDTH	TREAD WIDTH	REVOLUTIONS PER MILE	TREAD DEPTH IN 32nds	WEIGHT	PRICE
<b>OWL</b>													
1241430	P235/75R15	105 S	6.5	6.0 - 7.5	2028	1844	29.00	9.40	7.40	717	15.0	31	
1241431	P235/75R15 *	108 S	6.5	6.0 - 7.5	2183 +	1985 +	29.00	9.40	7.40	717	15.0	32	
1241432	P245/75R16	109 S	7.0	6.5 - 8.0	2271	2065	30.40	9.65	7.60	683	15.0	35	

\* Extra Load + @ 41 PSI

<sup>1</sup> When passenger tires are used in light truck service, Industry Tire and Rim Standards apply a 10% reduction in maximum rated load.

ITEM NUMBER	TIRE SIZE	LOAD RANGE	LOAD INDEX	MEAS. RIM WIDTH	APPROVED RIM WIDTH	MAXIMUM LOAD				OVERALL DIAM.	SEC. WIDTH	LOADED WIDTH	LOADED RADIUS	REV PER MILE	TREAD DEPTH IN 32nds	WEIGHT	PRICE
						SINGLE PSI	LBS.	DUAL PSI	LBS.								
<b>RBL</b>																	
1251550	LT215/85R16	E	115/112 N	6.0	5.5 - 7.0	80	2680	80	2470	30.48	8.41	10.0	14.1	684	18.0	40	
1251551	LT235/85R16	E	120/116 Q	6.5	6.0 - 7.0	80	3042	80	2778	31.90	9.29	10.5	14.7	654	18.0	46	
1251531	LT225/75R16	E	115/112 N	6.0	6.0 - 7.0	80	2680	80	2470	29.35	8.54	9.8	13.6	710	18.0	39	
1251532	LT245/75R16	E	120/116 Q	7.0	6.5 - 7.5	80	3042	80	2778	30.53	9.76	10.3	14.2	680	18.0	45	
<b>OWL</b>																	
1251552	LT255/85R16	D	119/116 N	7.0	6.5 - 8.0	65	3000	65	2755	33.21	10.04	10.7	15.2	628	18.0	48	
1251540	LT235/80R17	E	120/117 Q	6.5	6.0 - 8.0	80	3085	80	2835	31.85	10.30	10.8	14.5	652	18.0	46	
1251530	LT235/75R15	C	104/101 Q	6.5	6.0 - 7.0	50	1985	50	1820	28.62	9.14	9.7	13.4	715	18.0	35	
1251534	LT265/75R16	C	112/109 N	7.5	7.0 - 8.0	50	2470	50	2270	31.64	10.50	11.3	14.7	654	18.0	46	
1251535	LT265/75R16	D	119/116 N	7.5	7.0 - 8.0	65	3000	65	2755	31.73	10.52	11.3	14.7	654	18.0	48	
1251533	LT265/75R16	E	123/120 Q	7.5	7.0 - 8.0	80	3415	80	3085	31.76	10.59	11.3	14.7	654	18.0	50	
1251536	LT285/75R16	D	122/119 N	8.0	7.5 - 9.0	65	3305	65	3000	32.80	11.30	12.5	15.1	628	20.0	56	
1251537	LT315/75R16	D	121 Q	8.5	8.0 - 10.0	50	3195			34.60	12.87	13.3	16.6	615	20.0	64	
1251520	LT305/70R16	D	118/115 Q	9.0	8.0 - 9.5	50	2910	50	2680	32.81	12.29	12.6	15.2	626	18.0	56	
1251524	LT265/70R17	E	121/118 Q	8.0	7.0 - 9.0	80	3195	80	2910	31.65	11.03			656	18.0	52	
1251500	30X9.50R15LT	C	104 Q	7.5	6.5 - 8.5	50	1985			29.35	9.63	10.1	13.6	708	18.0	36	
1251501	31X10.50R15LT	C	109 Q	8.5	7.0 - 9.0	50	2270			30.47	10.71	11.4	14.0	687	18.0	41	
1251507	35X12.50R15LT	C	113 Q	10.0	8.5 - 11.0	35	2535			34.88	12.87	13.3	16.6	613	20.0	65	

# Trailcutter M/T



### Tread Design

Distinctive, ultra-rugged cleats designed for self-cleaning provide maximum traction.

### Application

Wide footprint and high void provides stability in even the most demanding usage.

### Performance

Wide grooves and full depth shoulder slots deliver exceptional performance in mud, snow and gravel. Pinned for studs for greater mud and snow traction.

ITEM NUMBER	TIRE SIZE	LOAD RANGE	LOAD INDEX	MEAS. RIM WIDTH	APPROVED RIM WIDTH	MAXIMUM LOAD				OVERALL DIAM.	SEC. WIDTH	LOADED WIDTH	LOADED RADIUS	REV PER MILE	TREAD DEPTH IN 32nds	WEIGHT	PRICE
						SINGLE PSI	SINGLE LBS.	DUAL PSI	DUAL LBS.								
<b>RBL</b>																	
1251050	LT235/85R16	E	120/116 N	6.5	6.0 - 7.0	80	3042	80	2778	31.80	9.30	10.2	14.7	652	18.0	43	
1251030	LT245/75R16	E	120/116 N	7.0	6.5 - 7.0	80	3042	80	2778	30.70	9.45	10.3	14.0	675	17.0	42	
<b>OWL</b>																	
1251032	LT265/75R16	C	112/109 N	7.5	7.0 - 8.0	50	2470	50	2270	32.00	10.10	11.3	14.8	655	18.5	45	
1251031	LT265/75R16	E	123/120 N	7.5	7.0 - 8.0	80	3415	80	3085	32.00	10.10	11.3	14.8	655	18.5	49	
1251033	LT285/75R16	D	122/119 N	8.0	7.5 - 9.0	65	3305	65	3000	33.10	11.30	12.9	15.6	646	18.5	54	
1251001	30X9.50R15LT	C	104 Q	7.5	8.5 - 8.5	50	1985			29.30	10.10	11.0	13.4	708	17.5	37	
1251000	31X10.50R15LT	C	109 Q	8.5	7.0 - 9.0	50	2270			30.50	10.50	12.0	14.0	681	20.0	41	
1251002	32X11.50R15LT	C	113 Q	9.0	8.0 - 10.0	50	2535			31.30	11.40	12.2	14.5	660	18.0	46	
1251003	33X12.50R15LT	C	108 Q	10.0	8.5 - 11.0	35	2205			32.51	12.50	13.7	14.9	638	19.0	53	
1251005	33X12.50R16.5LT	D	118 N	9.8	8.3 - 10.5	50	2910			32.50	12.70	13.8	15.0	638	19	57	

# Winter Quest Passenger



Superb ice and snow traction  
Enhanced wet/dry performance

Low noise ride  
Excellent stud retention

ITEM NUMBER	TIRE SIZE	SERVICE DESCRIPTION	MEASURING RIM WIDTH	APPROVED RIM WIDTH	MAXIMUM LOAD @44 PSI	OVERALL DIAMETER	SECTION WIDTH	TREAD WIDTH	REVOLUTIONS PER MILE	TREAD DEPTH IN 32nds	WEIGHT	PRICE
<b>RBL</b>												
1330010	175/70R13	82S	5.0	4.5 - 6.0	1047	22.90	6.80	5.05	907	13.0	15.0	
1330018	185/70R14	88S	5.5	4.5 - 6.0	1235	24.45	7.45	5.30	850	13.0	18.0	
1330020	195/70R14	91S	6.0	5.0 - 6.5	1356	25.00	7.75	5.60	831	13.0	18.0	
1330034	175/65R14	82T	5.0	5.0 - 6.0	1047	23.10	6.85	5.20	899	13.0	16.0	
1330036	185/65R14	86T	5.5	5.0 - 6.5	1168	23.55	7.35	5.57	882	13.0	17.0	
1330042	185/65R15	88T	5.5	5.0 - 6.5	1235	24.51	7.55	5.77	848	13.0	19.0	
1330044	195/65R15	91T	6.0	5.5 - 7.0	1356	25.00	7.85	6.09	831	13.0	20.0	
1330046	205/65R15	94T	6.0	5.5 - 7.5	1477	25.98	8.55	6.05	800	13.0	21.0	
1330048	215/65R15	96T	6.5	6.0 - 7.5	1565	25.98	8.55	6.50	800	13.0	23.0	
1330068	185/60R15	84T	5.5	5.0 - 6.5	1102	23.88	7.44	5.75	870	13.0	19.0	
1330070	195/60R15	88T	6.0	5.5 - 7.0	1235	24.30	7.80	6.05	855	13.0	20.0	
1330072	205/60R15	91T	6.0	5.5 - 7.5	1356	24.75	8.15	6.35	839	13.0	21.0	
1330074	215/60R15	94T	6.5	6.0 - 7.5	1477	25.21	8.60	6.70	824	13.0	22.0	
1330052	215/65R16	98T	6.5	6.0 - 7.5	1653	26.98	8.55	6.50	770	13.0	25.0	
1330076	205/60R16	92T	6.0	5.5 - 7.5	1389	25.75	8.15	6.48	807	13.0	23.0	
1330080	215/60R16	95T	6.5	6.0 - 7.5	1521	26.15	8.50	6.50	794	13.0	24.0	
1330082	225/60R16	98T	6.5	6.0 - 8.0	1653	26.57	8.75	6.70	782	13.0	25.0	
1330086	205/55R16	91T	6.5	5.5 - 7.5	1356	24.80	8.35	7.00	838	12.0	23.0	
1330094	225/55R17	97T	7.0	6.0 - 8.0	1609	26.88	9.20	7.49	773	13.0	28.0	
<b>WSW</b>												
1330026	195/75R14	92S	5.5	5.0 - 6.5	1389	25.65	7.60	5.20	810	13.5	19.0	
1330029	205/75R14	95S	5.5	5.0 - 7.0	1521	26.20	7.95	5.60	793	14.0	21.0	
1330069	205/70R14	95S	6.0	5.0 - 7.0	1521 ^	25.40	8.05	5.80	818	13.0	20.0	
1330071	215/70R14	96S	6.5	5.5 - 7.0	1565	25.90	8.50	6.15	802	13.0	22.0	
1330043	205/75R15	97S	5.5	5.0 - 7.0	1609	27.20	7.95	5.60	764	14.0	22.0	
1330045	215/75R15	100S	6.0	5.5 - 7.0	1764	27.80	8.40	5.80	747	14.0	24.0	
1330049	225/75R15	102S	6.0	6.0 - 7.5	1874	28.30	8.70	6.10	734	14.0	25.0	
1330051	235/75R15	105S	6.5	6.0 - 8.0	2039	28.90	9.10	6.40	719	14.5	27.0	
1330075	205/70R15	96S	6.0	5.0 - 7.0	1565	26.40	8.00	5.80	787	13.0	21.0	
1330078	215/70R15	98S	6.5	5.5 - 7.0	1653	26.90	8.40	6.15	772	13.0	23.0	
1330081	225/70R15	100S	6.5	6.0 - 7.5	1764	27.40	8.70	6.40	758	13.0	25.0	

^ 35 PSI

# Winter Quest SUV



ITEM NUMBER	TIRE SIZE	SERVICE DESCRIPTION	MEASURING RIM WIDTH	APPROVED RIM WIDTH	MAXIMUM LOAD @44 PSI	OVERALL DIAMETER	SECTION WIDTH	TREAD WIDTH	REVOLUTIONS PER MILE	TREAD DEPTH IN 32nds	WEIGHT	PRICE
<b>BSW</b>												
1340008	235/75R15 *	109S	6.5	6.0 - 7.5	2271	29.00	9.40	7.20	716	15.0	33.0	
1340044	235/70R15	103S	7.0	6.0 - 7.5	1929 <sup>^</sup>	28.00	9.65	7.40	742	15.0	30.0	
1340024	235/75R16	108S	6.5	6.0 - 8.0	2205 <sup>^</sup>	29.85	9.30	7.00	696	15.0	34.0	
1340026	225/75R16	104S	6.0	6.0 - 7.5	1984	29.18	8.65	6.80	712	15.0	31.0	
1340028	245/75R16	111S	7.0	6.5 - 8.0	2403	30.40	9.60	7.40	683	15.0	35.0	
1340036	265/75R16	116S	7.5	7.0 - 9.0	2756	31.60	10.60	8.10	657	15.0	39.0	
1340048	215/70R16	100S	6.5	5.5 - 7.0	1764	27.75	8.80	7.20	749	15.0	30.0	
1340050	225/70R16	102S	6.5	6.0 - 7.5	1874	28.30	9.00	7.00	734	15.0	30.0	
1340054	235/70R16	106S	7.0	6.0 - 7.5	2094	28.85	9.40	7.40	720	15.0	32.0	
1340058	245/70R16	107S	7.0	6.5 - 8.0	2149	29.50	9.85	7.70	704	15.0	34.0	
1340062	255/70R16	111S	7.5	6.5 - 8.0	2403	29.90	10.30	8.00	695	15.0	35.0	
1340066	265/70R16	112S	8.0	7.0 - 9.0	2469	30.40	10.80	8.00	683	15.0	39.0	
1340070	265/70R17	115S	8.0	7.0 - 9.0	2679	31.40	10.65	8.30	662	15.0	41.0	
1340072	245/70R17	110S	7.0	6.5 - 8.0	2337	30.50	9.85	7.70	681	15.0	35.0	
<b>OWL</b>												
1340076	245/65R17	107S	7.0	7.0 - 8.5	2149	29.52	9.82	9.27	704	14.0	35.0	
1340074	235/65R17	104S	7.0	6.5 - 8.5	1984	29.11	9.45	7.65	714	14.0	33.0	

<sup>^</sup> 35 PSI, \* Extra Load

# Trailcutter M & S



ITEM NUMBER	TIRE SIZE	LOAD INDEX	MEAS. RIM WIDTH	APPROVED RIM WIDTH	MAXIMUM LOAD				OVERALL DIAM.	SEC. WIDTH	LOADED WIDTH	LOADED RADIUS	REV PER MILE	TREAD DEPTH IN 32nds	WEIGHT	PRICE
					SINGLE LBS.	PSI	DUAL LBS.	PSI								
1255001	31X10.50R15LT	109Q	8.5	7.0 - 9.0	2270	50	----	----	30.25	10.50	11.4	14.0	685	19.0	40.0	
1255030	LT235/75R15	104/101Q	6.5	6.0 - 7.0	1985	50	1820	50	28.82	9.00	9.7	13.4	715	17.0	34.0	
1255032	LT245/75R16	120/116Q	7.0	6.5 - 7.5	3042	80	2778	80	30.44	9.57	10.3	14.2	680	17.0	44.0	
1255051	LT235/85R16	120/116Q	6.5	6.0 - 7.0	3042	80	2778	80	31.78	9.31	10.5	14.7	654	17.0	42.0	
1255031	LT225/75R16	115/112Q	6.0	6.0 - 7.0	2680	80	2470	80	29.30	8.95	9.8	13.6	710	17.0	38.0	
1255038	LT245/75R16	108/104Q	7.0	6.5 - 7.5	2205	50	2006	50	30.44	9.57	10.3	14.2	680	17.0	40.0	
1255034	LT265/75R16	112/109Q	7.5	7.0 - 8.0	2470	50	2270	50	31.54	10.33	11.3	14.7	654	17.0	43.0	
1255033	LT265/75R16	123/120Q	7.5	7.0 - 8.5	3415	80	3085	80	31.54	10.50	11.3	14.7	654	17.0	47.0	
1255024	LT265/70R17	121/118Q	8.0	7.0 - 9.0	3195	80	2910	80	31.65	11.03	11.3	14.7	656	18.0	49.0	
1255022	LT245/70R17	119/116Q	7.0	6.5 - 8.0	3000	80	2755	80	30.45	10.07	10.7	14.1	679	17.0	44.0	
1255040	LT235/80R17	120/117Q	6.5	6.0 - 8.0	3085	80	2835	80	31.85	9.40	10.3	14.5	652	18.0	44.0	
1255025	LT275/70R17	114/110Q	8.0	7.0 - 9.0	2600	50	2335	50	32.2	11.32	12.6	15.0	645	18.0	47.0	

Tempra Touring tr



Tempra Touring vr/hr



Tempra G/T Radial



Tempra Tour SUV



Tempra Duration



Tempra Radial SUV



Trailcutter Radial A/T



Trailcutter Radial AP



# Mileage Plus Limited Warranty

## STANDARD COVERAGE

If your LARAMIE tire becomes unserviceable as a result of a defect in workmanship or material during the first 1/32" of tread wear, it will be replaced with an equivalent LARAMIE tire, **FREE OF CHARGE**. When the tread is worn more than 1/32", a replacement charge will be required to obtain a replacement tire.

The replacement charge will be determined by multiplying your original purchase price by the percentage of original tread depth worn from the tire. You must pay for mounting, balancing and any other additional charges, such as taxes or the acceptance of a higher priced replacement tire.

## LARAMIE MILEAGE PLUS COVERAGE

If your LARAMIE Grandeur Classic tire becomes unserviceable as a result of a defect in workmanship or material during the first 50% of tread wear, or your Performer SUV tire becomes unserviceable as a result of a defect in workmanship or material during the first 25% of tread wear, it will be replaced with an equivalent new LARAMIE tire **FREE OF CHARGE**. You must present your MILEAGE PLUS WARRANTY BROCHURE and be the original owner when requesting a replacement for your LARAMIE tire. Otherwise, you will be required to pay the replacement charge described in the above standard coverage in order to obtain your replacement tire.

## TREAD WEAR PROTECTION

The following LARAMIE radial tires are warranted against tread wear out prior to the applicable indicated mileage:

Tire	Warranty
Grandeur Classic	80,000 miles
Grandeur Sprint V/H	50,000 miles
Performer HP	50,000 miles
Performer SUV	60,000 miles
Steelrider	50,000 miles
Stealth SUV	40,000 miles
Performer A/T	50,000 miles
Performer RV	50,000 miles

Provided that you:

1. Are the original owner
2. Rotate your tires every 8,000 miles and it is recorded in the rotation schedule in the mileage brochure.
3. Present the tire for adjustment.
4. Present your Mileage Plus Warranty Brochure when requesting an adjustment and the Date of Purchase, Car Make, Model, Odometer Reading, and Rotation Record are properly recorded.

If the tire wears to the tread wear indicators in less than the miles warranted within the warranty period, a pro-rated adjustment will be made according to actual mileage delivered. Your replacement cost will be determined by dividing the actual mileage delivered by the miles warranted and multiplying the result times the current selling price of an equivalent or comparable replacement tire. You must pay for mounting and balancing and any other additional charges, such as taxes or the acceptance of a higher priced replacement tire.

## TREAD LIFE

When the tread becomes worn to 2/32" (shown by tread wear indicators molded into the tread grooves), the tire is worn out.

## WHAT ISN'T COVERED

Tires which become unserviceable due to:

1. Conditions resulting from road hazards such as (a) cuts, (B) snags, or (C) punctures.
2. Conditions resulting from (A) improper installation, (B) wheel misalignment, or (C) tire-wheel assembly imbalance.
3. Conditions resulting from (A) improper tire and vehicle maintenance, (B) misuse, (C) abuse, (D) accident.
4. Ride complaints after the first 2/32" tread wear.
5. Use in any commercial application.
6. Ozone or weather checking on tires over four (4) years from date of manufacture.

OR

Tires which are:

1. Installed on any vehicle other than the vehicle on which it was first installed.
2. Sold or adjusted outside of the 48 contiguous Continental United States and the District of Columbia.
3. Branded "NON-ADJ" (Non-Adjustable)

Tires branded "BLEMISH", "MALWEAR", OR "NON-UNIF" (non Uniform) are not covered under the LARAMIE Mileage Plus Limited Warranty provided herein.

## REPLACEMENT WARRANTY

If you receive a replacement tire under the terms of this warranty, the replacement tire will be covered by the Warranty then currently given by LARAMIE for the tire.

## WHERE TO GO FOR WARRANTY REPLACEMENT

If a tire which is subject to this warranty becomes unserviceable, you should take the tire back to the dealer where you bought it. Should this, for any reason, not be possible, you may take it to the nearest LARAMIE dealer. Please consult telephone directory for locations. It is your obligation to present unserviceable tire to the dealer.

## CONDITIONS AND EXCLUSIONS

Any tire, no matter how well constructed, may fail in service or otherwise become unserviceable due to conditions beyond the control of the manufacturer. Nothing in this Warranty is intended to be a representation by LARAMIE that tire failure cannot occur.

LARAMIE DISCLAIMS ANY LIABILITY FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES TO THE EXTENT PERMITTED BY LAW.

Some states do not allow exclusion of incidental or consequential damages so this limitation or exclusion may not apply to you.

## CONSUMER RIGHTS

This Warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

## OWNERS' OBLIGATION

When making a claim, you must return the tire to be replaced to your LARAMIE dealer and sign the customer signature section of the LARAMIE Tire Claim Form.


Proper vehicle and tire care is necessary to obtain the expected wear from a tire. It is your obligation to properly maintain your tires and the vehicle upon which they are mounted including: (A) operating your tires at the inflation pressures recommended by the vehicle manufacturer, (B) keeping your tire/wheel assemblies in balance, and (C) proper wheel alignment.

We recommend that you have your LARAMIE dealer inspect your tires any time you notice irregular or uneven tread wear and rotate them if necessary.





DISTRIBUTED BY:

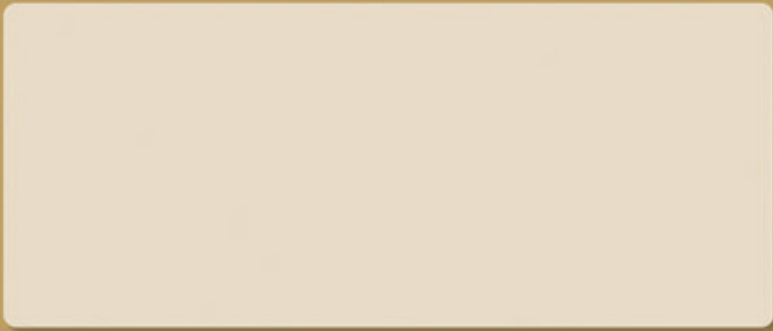

**LARAMIE**  
**TIRE**

[LARAMIETIRE.COM](http://LARAMIETIRE.COM)

LA4100 9/06 5M