


# ALPHA TIRE SYSTEMS


## Skid Steer

Skid Steer Tire Specification Sheets

Form Spec. ATS2003-1 3-Dec-02 Page 15 of 28

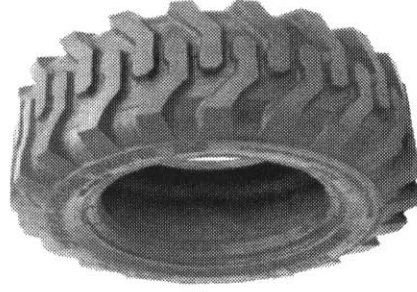

**SKS DIG'R ES**

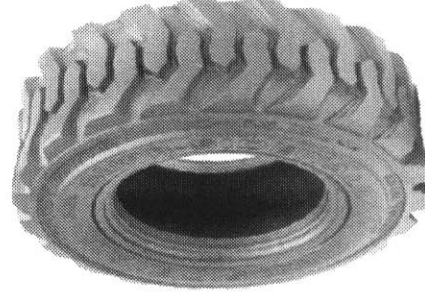

**SKS SUPER-TRAK MUD'R**

Cat.#	Size/PR/Type	Design	Stand. Rim	Approved Rim	Max. Load	Infl.	Unloaded		Loaded	Tire Wt.	Tread Depth
							Infl. Dim.	Static Radius			
					lbs	psi/bar	ins	ins	ins	lbs	mm/32NDS
<b>Alpha Brand Skid Steer Bias Tires SUPER-TRAK DIG'R ES SUPER SIDEWALL</b>											
16052	10-16.5/10TL	Alpha DIG'R ES	8.25		4770	75/5.20	10.40	30.43	13.80	46.86	15.88/20
16056	12-16.5/12TL	Alpha DIG'R ES	9.75		6380	80/5.50	12.10	32.73	15.00	59.18	19.05/24
16058	14-17.5/16TL	Alpha DIG'R ES	10.50		8260	100/6.90	13.75	36.25	16.30	111.98	23.0/29
16059	15-19.5/16TL	Alpha DIG'R ES	11.75	12.25	11300	90/6.20	15.30	40.12	18.00	130.46	25.4/32

<b>Alpha Brand Skid Steer Bias Tires SUP'R TRAK MUD'R Triple Step Tread SUPER-SIDEWALL (TST)</b>											
Cat.#	Size/PR/Type	Design	Stand. Rim	Approved Rim	Max. Load	Infl.	Unloaded		Loaded	Tire Wt.	Tread Depth
							Infl. Dim.	Static Radius			
					lbs	psi/bar	ins	ins	ins	lbs	mm/32NDS
16000	5.70-12/8TL	Alpha SUPR-TRAK MUDR	4.50-1-70	I-90,5JA	1870	90/6.20	5.75	22.46	10.30	17.60	15.0/19
16002	23X8.50-12/8TL	Alpha SUPR-TRAK MUDR	7.00-1-70	I-90,7JA	2170	65/4.50	8.40	22.60	10.40	27.94	15.0/19
16004	27X8.50-15/10TL	Alpha SUPR-TRAK MUDR	7JA		2270	70/4.80	8.50	26.00	12.20	34.76	15.0/19
16054	10-16.5/10TL	Alpha SUPR-TRAK MUDR	8.25		4770	75/5.20	10.40	30.43	13.80	60.50	16.5/21
16028	10-16.5/12TL	Alpha SUPR-TRAK MUDR	8.25		5400	90/6.20	10.40	30.43	13.80	62.26	16.5/21
16030	10-16.5/14TL	Alpha SUPR-TRAK MUDR	8.25		6040	105/7.20	10.40	30.43	13.80	62.92	16.5/21
16038	12-16.5/14TL	Alpha SUPR-TRAK MUDR	9.75		7160	95/6.60	12.10	32.73	15.00	81.18	20.3/26
16040	12-16.5/16TL	Alpha SUPR-TRAK MUDR	9.75		7920	110/7.60	12.10	32.73	15.00	81.62	20.3/26


# ALPHA TIRE SYSTEMS

## Skid Steer

Skid Steer Tire Specification Sheets

Form Spec. ATS2003-1 3-Dec-02 Page 16 of 28

Cat.#	Size/PR/Type	Design	Stand. Rim	Approved Rim	Max. Load lbs	Infl. psi/bar	Unloaded		Tire Wt. lbs	Tread Depth mm/32NDS	
							Infl. Dim. Sect. Width	Load Static Radius			
							ins	ins			
<b>Alpha Brand Skid Steer Bias Tires SUP'R TRAK MUD'R Triple Step Tread OUTSIDEWALL</b>											
16029L	10-16.5/12TL	SUPR-TRAK MUDR-OSWL	8.25		5400	90/6.20	11.00	30.43	13.80	66.66	16.5/21
16029R	10-16.5/12TL	SUPR-TRAK MUDR-OSWR	8.25		5400	90/6.20	11.00	30.43	13.80	66.66	16.5/21
16031L	10-16.5/14TL	SUPR-TRAK MUDR-OSWL	8.25		6040	105/7.20	11.00	30.43	13.80	67.32	16.5/21
16031R	10-16.5/14TL	SUPR-TRAK MUDR-OSWR	8.25		6040	105/7.20	11.00	30.43	13.80	67.32	16.5/21
16039L	12-16.5/14TL	SUPR-TRAK MUDR-OSWL	9.75		7160	95/6.60	13.00	32.73	15.00	85.58	20.3/26
16039R	12-16.5/14TL	SUPR-TRAK MUDR-OSWR	9.75		7160	95/6.60	13.00	32.73	15.00	85.58	20.3/26
16041L	12-16.5/16TL	SUPR-TRAK MUDR-OSWL	9.75		7920	110/7.60	13.00	32.73	15.00	86.02	20.3/26
16041R	12-16.5/16TL	SUPR-TRAK MUDR-OSWR	9.75		7920	110/7.60	13.00	32.73	15.00	86.02	20.3/26

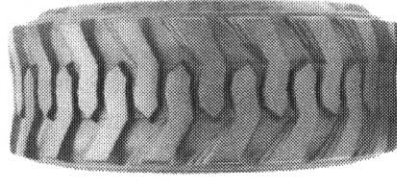

**SKS SUPER-TRAK  
MUD'R  
OUTSIDEWALL**

# ALPHA TIRE SYSTEMS

## Skid Steer

Skid Steer Tire Specification Sheets

Form Spec. ATS2003-1

3-Dec-02

Page 17 of 28

Cat.#	Size/PR/Type	Design	Stand. Rim	Approved Rim	Max. Load	Infl.	Unloaded		Load	Tire Wt.	Tread Depth
							Infl. Dim. Sect. Overl. Width	Static Radius			
					lbs	psi/bar	ins	ins	ins	lbs	mm/32NDS
<b>Alpha Brand Skid Steer Bias Tires Trak-Tor SUPER SIDEWALL</b>											
16102	10-16.5/10TL	Alpha TRAK-TOR SFT	8.25		4770	75/5.20	10.40	30.43	14.00	66.00	16.5/21
16104	12-16.5/12TL	Alpha TRAK-TOR SFT	9.75		6380	80/5.50	12.10	32.73	15.06	75.46	20.3/26
16108	14-17.5/16TL	Alpha TRAK-TOR SFT	10.5		8260	100/6.90	13.75	36.25	16.30	116.82	25.4/32
16110	15-19.5/16TL	Alpha TRAK-TOR SFT	11.75	12.25	11300	90/6.20	15.30	40.12	18.00	147.18	28.7/36



**SKS TRAK-TOR SFT**


# ALPHA TIRE SYSTEMS

## Skid Steer

Skid Steer Tire Specification Sheets

Form Spec. ATS2003-1 3-Dec-02 Page 18 of 28

Cat.#	Size/PR/Type	Design	Stand . Rim	Approved Rim	Max. Load	Infl.	Unloaded		Loaded	Tire Wt.	Tread Depth
							Ins	Ins			
<b>Alpha Brand Skid Steer Bias Tires Trak-Tor OUTSIDEWALL</b>											
16120L	10-16.5/10TL	TRAK-TOR SFT OSW-L	8.25		4770	75/5.20	10.90	30.43	14.00	72.60	16.5/21
16120R	10-16.5/10TL	TRAK-TOR SFT OSW-R	8.25		4770	75/5.20	10.90	30.43	14.00	72.60	16.5/21
16122L	12-16.5/12TL	TRAK-TOR SFT OSW-L	9.75		6380	80/5.50	12.60	32.73	15.06	81.18	20.3/26
16122R	12-16.5/12TL	TRAK-TOR SFT OSW-R	9.75		6380	80/5.50	12.60	32.73	15.06	81.18	20.3/26
16124L	14-17.5/16TL	TRAK-TOR SFT OSW-L	10.5		8260	100/6.90	14.25	36.25	16.30	123.20	25.4/32
16124R	14-17.5/16TL	TRAK-TOR SFT OSW-R	10.5		8260	100/6.90	14.25	36.25	16.30	123.20	25.4/32
16126L	15-19.5/16TL	TRAK-TOR SFT OSW-L	11.75	12.25	11300	90/6.20	15.80	40.12	18.00	155.10	28.7/36
16126R	15-19.5/16TL	TRAK-TOR SFT OSW-R	11.75	12.25	11300	90/6.20	15.80	40.12	18.00	155.10	28.7/36

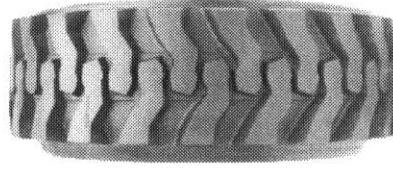

**SKS SUPER-TRAK**  
**SFT OUTSIDEWALL**